

Eckel® Electric Power Unit


60HP-60Hz, 480 Volt - PN110035



Eckel's power units are designed to provide maximum power output from a compact and rugged design. Electric or diesel powered units are available to provide reliable power (65 GPM and 2,500 psi) to tubing tongs and other applications. Hydraulic power units are available in standard or custom designed configurations. Our units meet the industry's highest standard through every step of design, manufacture, and quality-control. Expendable parts are specially selected from the best of recognized brands for easy replacement in any part of the world.

Features

- Open Center Hydraulic System
- Single Point Lifting Frame
- Explosion proof starter enclosure
- 70 U.S. gallons (265 Liters) Hydraulic Oil Reservoir
- Return Filter - 10 Micron
- Suction Strainer
- Air Blast Heat Exchanger
- Remote Start/Stop Switch with 50 Foot Cable
- Connection for Detachable Hoses
- Hydraulic Pump Complete With: Unloader Valve, Check Valve, Relief Valve

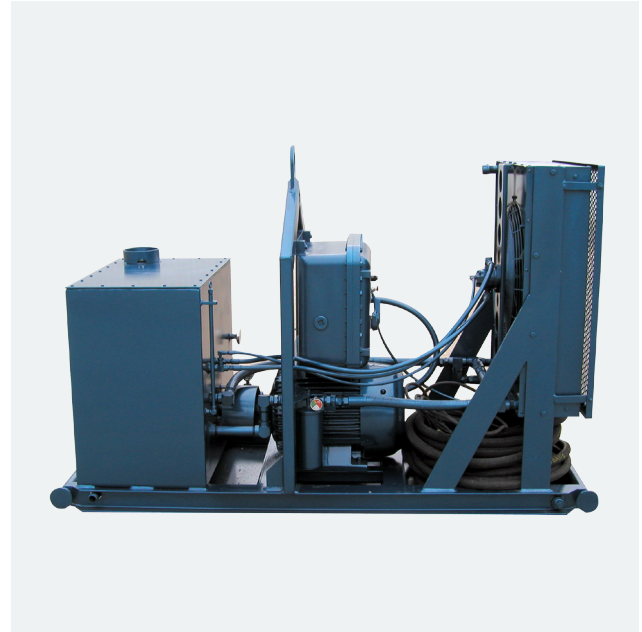

EPU SPECIFICATIONS, 60 HP 60 HZ, 480 VOLT

Dimensions	40 x 94 in. (1016 x 2388 mm)
Height	63 in. (1600 mm)
Weight with Oil	3,775 lbs (1712 kgs.)
60 HP 60 Hz 240/480 Volt	
Explosion Proof Electric Motor	
Air Blast Heat Exchanger with 1/2 HP Electric Motor	
Hydraulic Output @ 65 GPM (246 LMP)	
0 - 1,000 PSI (0-68 bar)	
Hydraulic Output @ 27 GPM (102 LMP)	
1,000 - 2,500 PSI (68.8-172 bar)	
RPM Rating	1,800

Eckel Manufacturing Co., Inc / Eckel International (FSC)
8035 North County Road West, Odessa, TX
E: sales@eckel.com T +1-432-362-4336 / 800-654-4779
LinkedIn: Eckel Manufacturing

www.eckel.com

202701

ECKEL[®]
HYDRAULIC POWER TONGS